



FITTING INSTRUCTIONS

1984 AND ON TOYOTA HILUX EXTRA CAB REAR STEP TOW BAR

PART No 3614020


TOOLS REQUIRED -

Basic Tool Kit

PROCEDURE -

1. Remove original rear step, number plate and spare wheel.
2. Use silicone between tread plate and rear step tow bar to eliminate vibration.
3. Lift rear bar into position and fit 2 x 1/2" x 4" bolts through chassis to the innermost holes on rear bar, using square washers on inside of chassis. Finger tighten only.
4. Fit all remaining bolts, being sure to use rectangular plates as shown in diagram 1 on inside of chassis to cover large holes. Finger tighten only.
5. Tighten bolts which go through rectangular plates first to position rear bar.
6. Tighten all other bolts.
7. Fit two eye bolts and tighten. Install hitch using pull pin and R clip.
8. Modify number plate to clear rear bar and spare wheel carrier handle by cutting notch to clear crank handle and raising number plate to clear rear bar. Refit spare tyre.
9. Adhere tow bar specification plate to smooth surface.

DIAGRAM 1

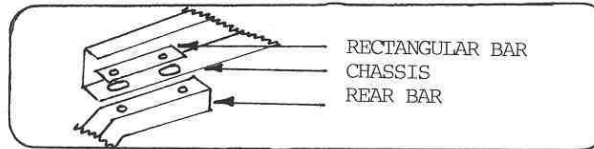

10. Add the tow warning label as shown below. *Note: This label must not be removed*

